


Pocket Multimeters



Technical Data

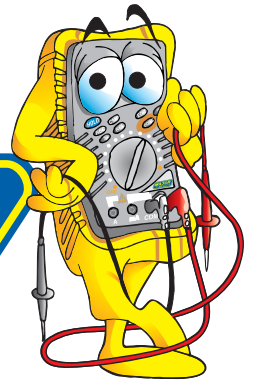

MT832

The MT832 is an ideal meter for general purpose site applications. The MT832 has a mirrored scale for accurate measurements and is supplied standard with a protective rubber holster. This meter is ideal for students, hobbyist and the homeowner.

Features Include:

- Auto Ranging DMM
- DC Current to 10 Amps
- Measures Resistance up to 20MΩ
- Measures AC and DC Voltage to 1000V
- Large Mirror Scale
- Continuity Buzzer
- Transistor test
- 20kΩ/V Sensitivity

Ordering Information

HEAD OFFICE

Cnr Rover and Jaguar Roads, Rustivia Ext 3, Elandsfontein
 P.O. Box 888, Isando 1600, South Africa
 Telephone: +27 11 822 1551
 Sales Fax: +27 11 822 2806
 Admin Fax: +27 11 822 1411
 e-mail: sales@major-tech.com
 National Tel: 08 61 MAJORT / 08 61 62 5678

BRANCHES - CAPE TOWN

109 Kyalami Drive, Killarney Gardens
 P.O. Box 60122, Tabelview 7439
 Telephone: +27 21 556 3091
 Sales Fax: +27 21 556 3093

BRANCHES - DURBAN

6A Pastel Park, Wareing Road,
 Pinetown
 P.O. Box 15550, Ashwood 3605
 Telephone: +27 31 701 5830
 Sales Fax: +27 31 701 6986

BRANCHES - PORT ELIZABETH

175 Kempston Road, Sidwell
 P.O. Box 22499, Port Elizabeth 6000
 Telephone: +27 41 453 3818
 Sales Fax: +27 86 633 9809



Measurement	Range	Accuracy
DC Voltage	0.1	± 3% of FS
	0.5	
	2.5	
	10	
	50	
	250	
AC Voltage	10V	± 4% of FS
	50V	
	250V	
	1000V	
DC Current	50μA	± 3% of FS
	2.5mA	
	25mA	
	0.25A	
Resistance	10A	± 3% of Arc
	0.2 ~ 20MΩ	
Battery Life	157 Hours	
Size (L x W x D)	104 x 55 x 32mm	
Weight	145g	